






SHENZHEN JQL ELECTRONICS CO.,LTD

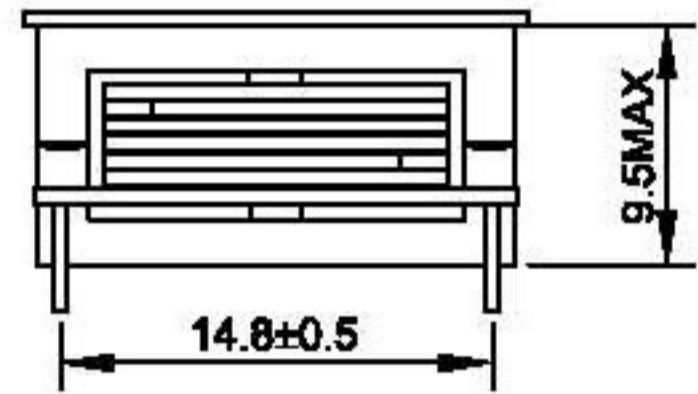


FRONT VIEW

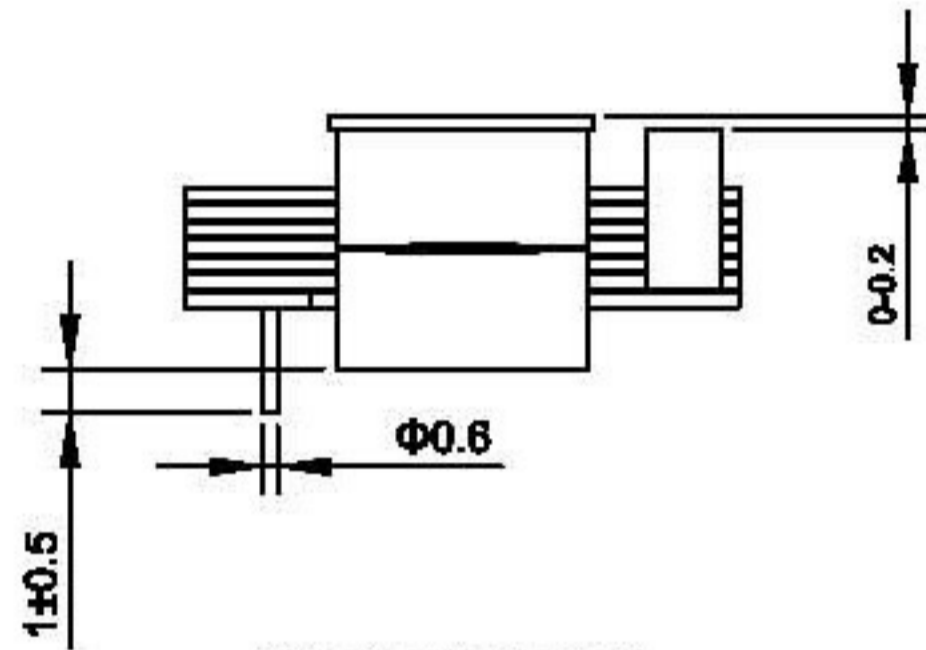


SIDE VIEW

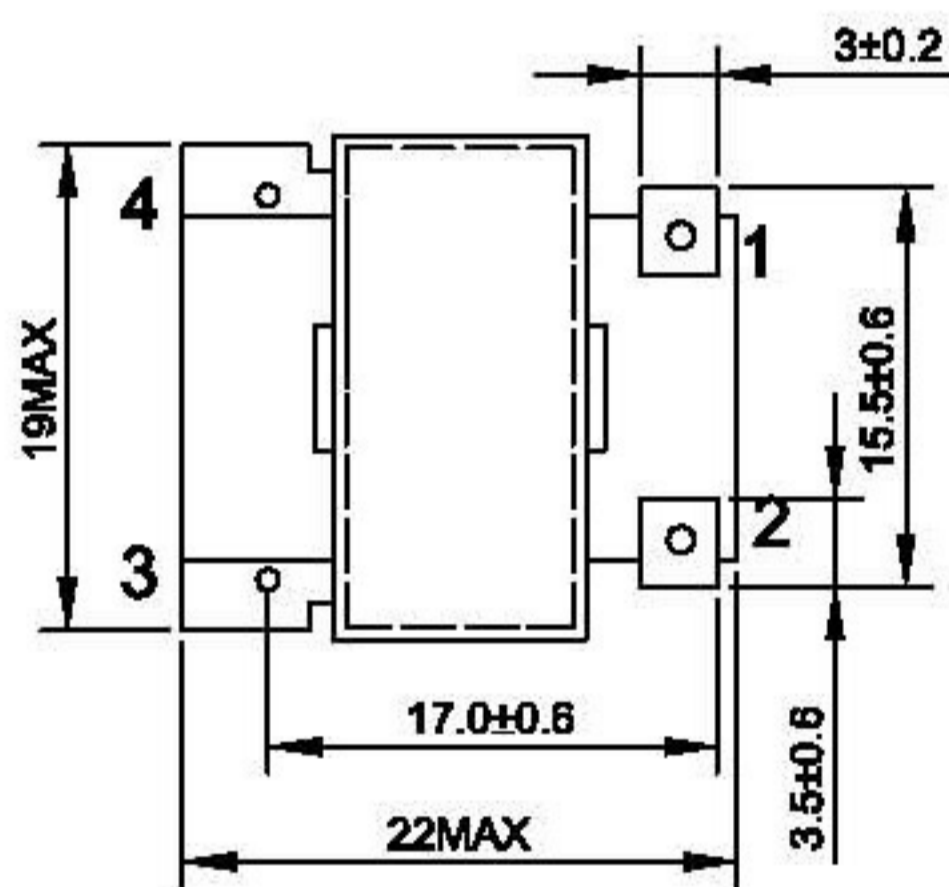

BOTTOM VIEW

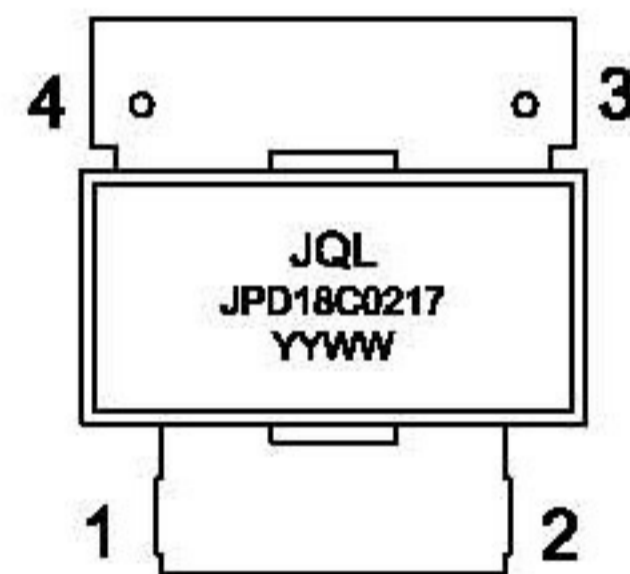

TOP VIEW

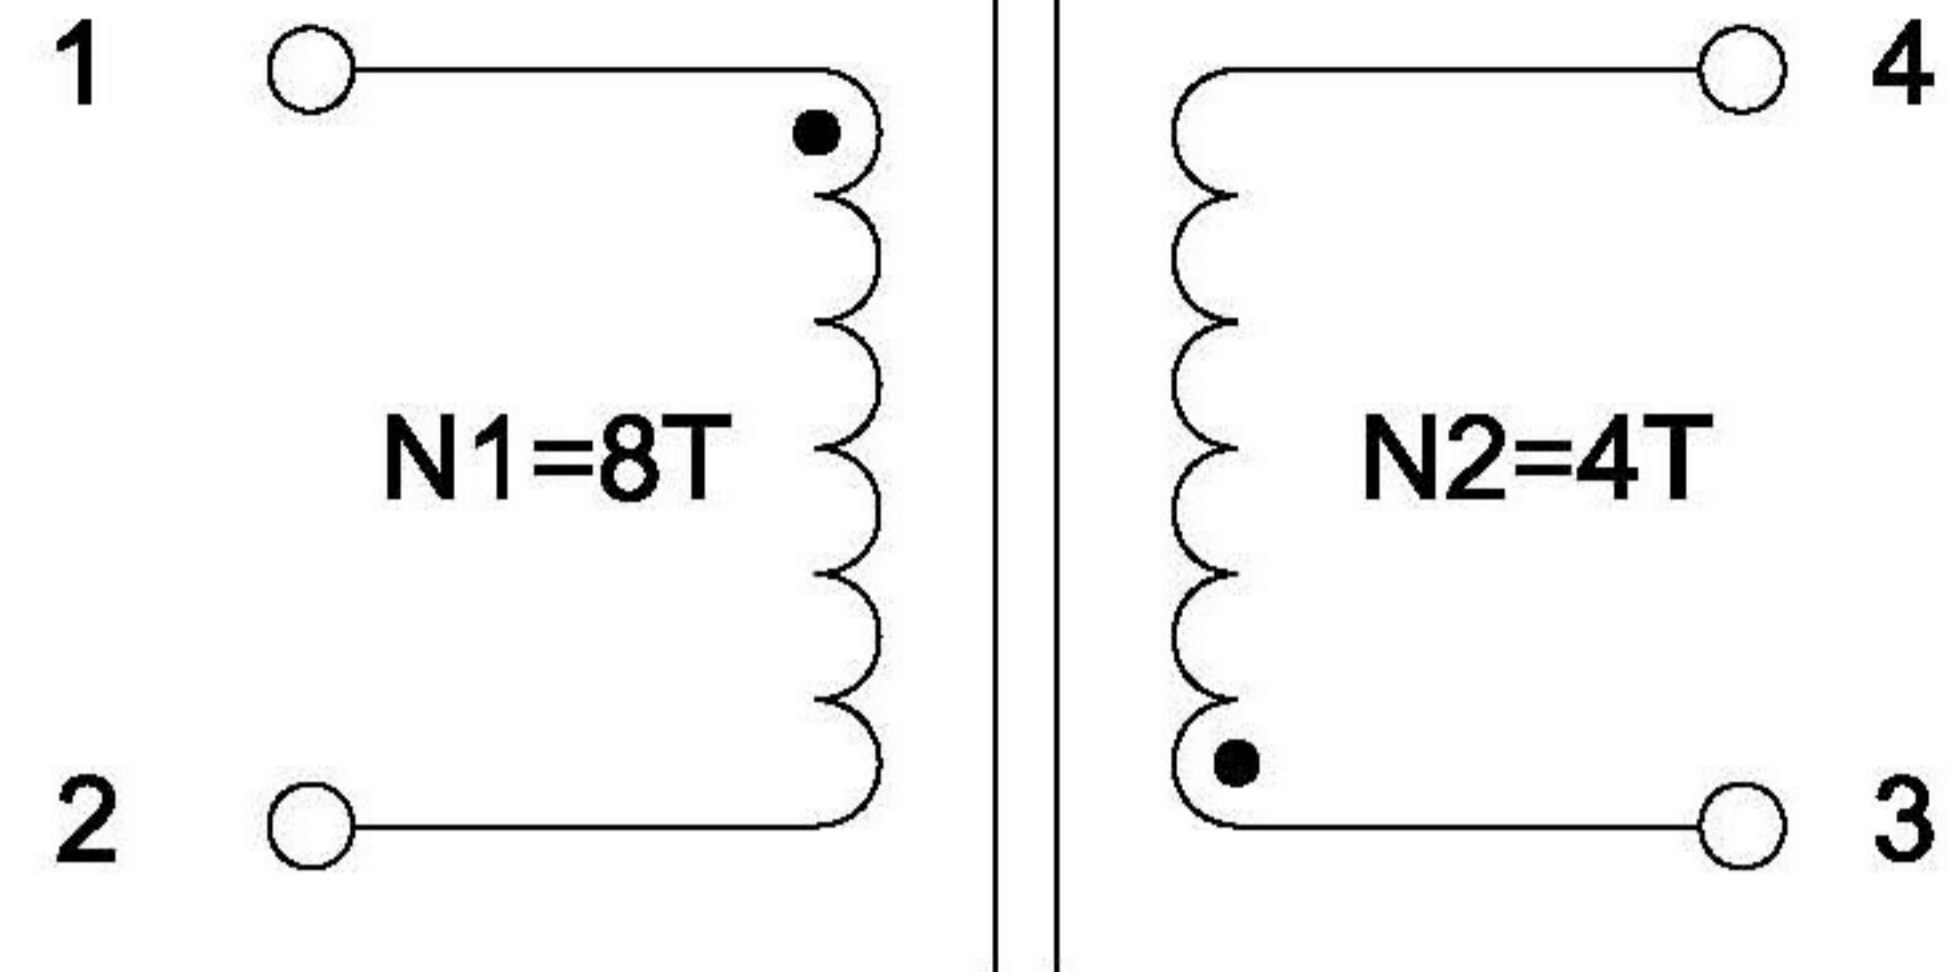

TEST NOTES

UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 100 KHz, 1000mV, 25°C ± 5°C.

1. TURNS RATIO AND POLARITY:(100% TEST)
 $(3-4)/(1-2) = 4:8$
2. INDUCTANCE:(100% TEST)
 $(1-2) = 10.0\mu H \pm 0.8\mu H$
3. DCR:(SAMPLE TEST)
 $(1-2) = 15\text{ m}\Omega\text{ MAX}$
4. HI-POT:(100% TEST)
PRI-SEC : DC 1.5KV/1mA/60sec
PRI-CORE: DC 1.5KV/1mA/60sec
SEC-CORE: DC 1.5KV/1mA/60sec