






# SHENZHEN JQL ELECTRONICS CO.,LTD

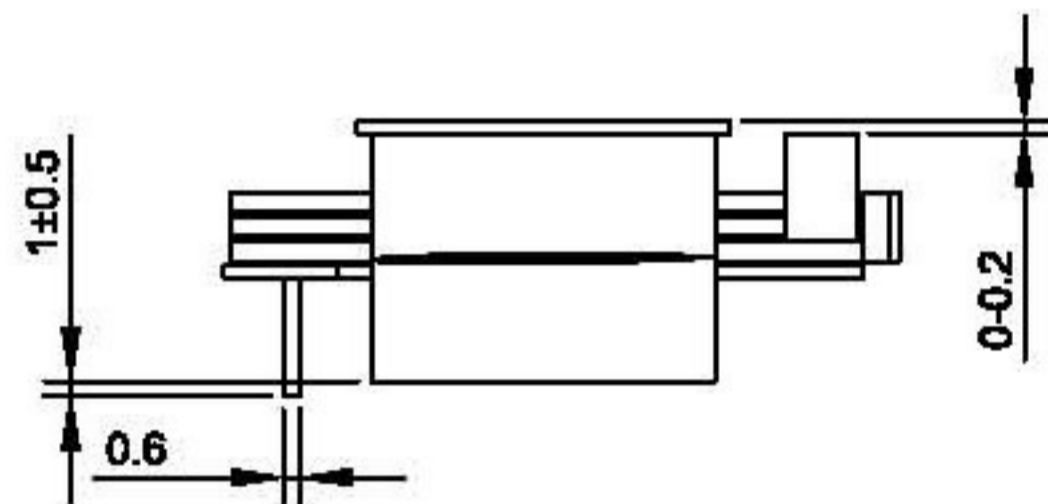


FRONT VIEW

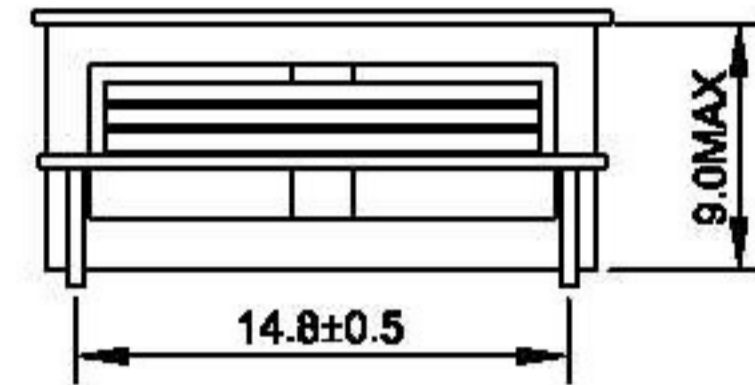


SIDE VIEW

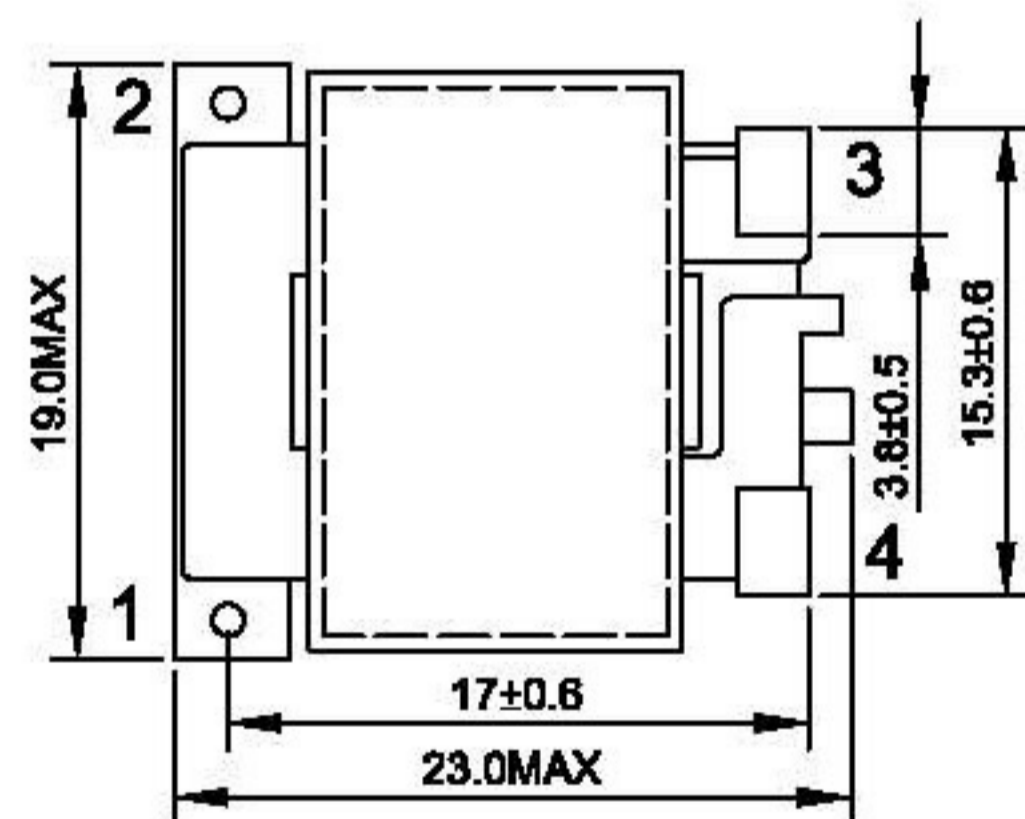

BOTTOM VIEW

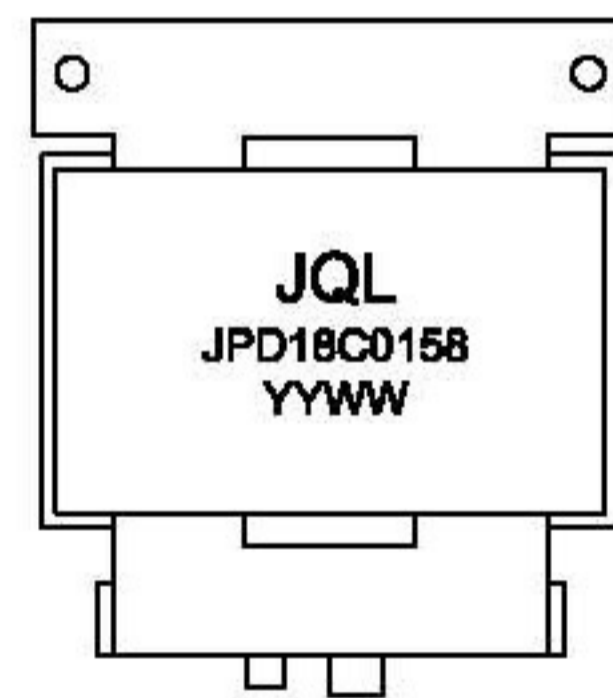

TOP VIEW

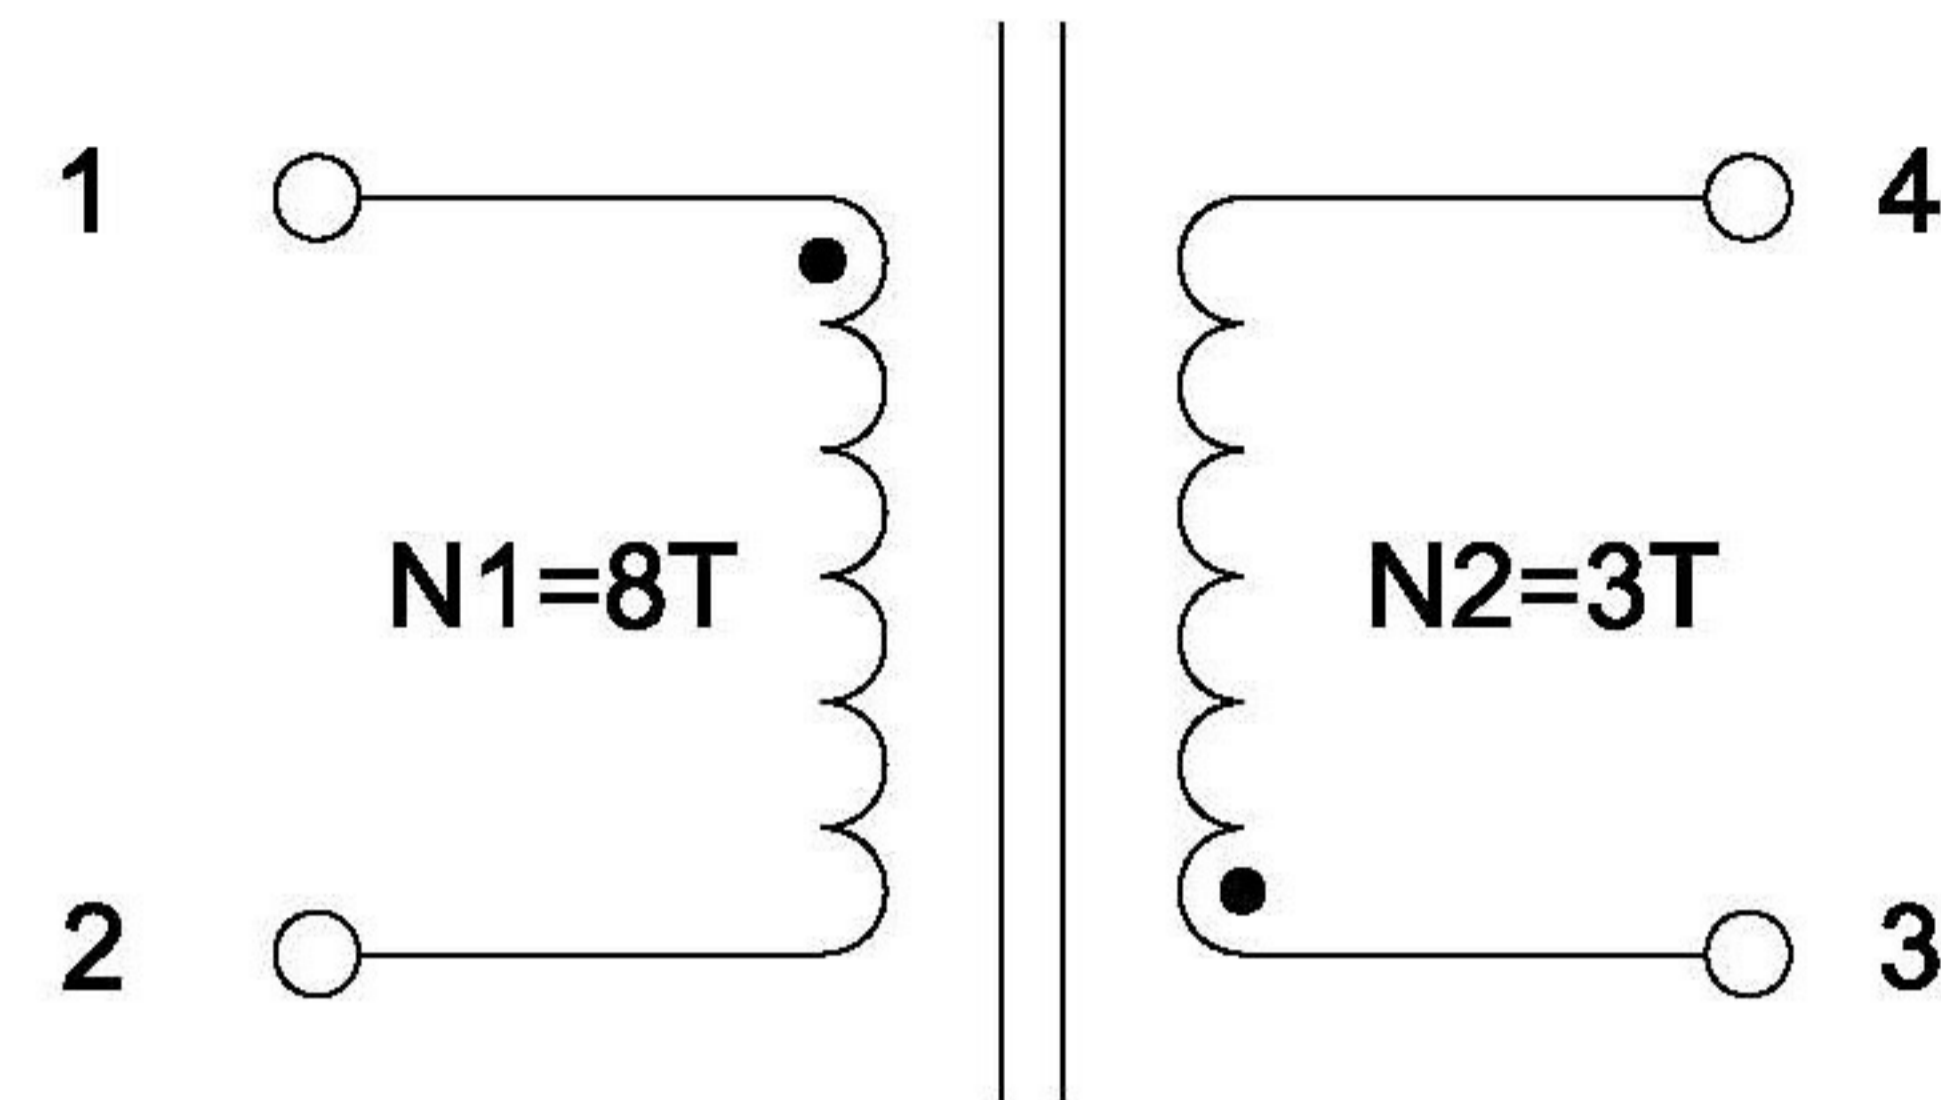

## TEST NOTES

UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 100 KHz, 1000mV, 25°C ± 5°C.

1. TURNS RATIO AND POLARITY:(100% TEST)  
 $(3-4)/(1-2) = 3:8$
2. INDUCTANCE:(100% TEST)  
 $(3-4) = 1.05\mu H \pm 0.15\mu H$
3. DCR:(SAMPLE TEST)  
 $(3-4) = 2.2\ m\Omega\ MAX$   
 $(1-2) = 300\ m\Omega\ MAX$
4. HI-POT:(100% TEST)  
PRI-SEC : DC 1.5KV/1mA/60sec  
PRI-CORE: DC 1.5KV/1mA/60sec  
SEC-CORE: DC 0.5KV/1mA/60sec